

Scilab Manual for
Antenna Wave Propagation
by Mrs Nandini Ammanagi
Electronics Engineering
VESIT¹

Solutions provided by
Mrs. Nandini Ammanagi
Electronics Engineering
V.E.S.I.T.

May 18, 2024

¹Funded by a grant from the National Mission on Education through ICT,
<http://spoken-tutorial.org/NMEICT-Intro>. This Scilab Manual and Scilab codes
written in it can be downloaded from the "Migrated Labs" section at the website
<http://scilab.in>

Contents

List of Scilab Solutions	3
1 SCILAB CODE FOR PATTERN MULTIPLICATION OF TWO INFINITESIMAL DIPOLES (given $d=$ /2, $\theta=$ /2)	5
2 SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT UNIFORM AMPLITUDE EENDFIRE ARRAY	10
3 SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT UNIFORM AMPLITUDE BROADSIDE AR- RAY	13
4 SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT DOLPH TSCHEBYSCHEFF ARRAY	16
5 SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT BIONOMIAL ARRAY	19

List of Experiments

Solution 1.01	patternmult	5
Solution 1.02	patternmult	7
Solution 2.01	endfirearray	10
Solution 3.01	broadsidearray	13
Solution 4.01	dolpharray	16
Solution 5.01	binomialarray	19

List of Figures

1.1	patternmult	7
1.2	patternmult	9
2.1	endfirearray	12
3.1	broadsidearray	15
4.1	dolpharray	18
5.1	binomialarray	20

Experiment: 1

SCILAB CODE FOR PATTERN MULTIPLICATION OF TWO INFINITESIMAL DIPOLES (given $d= \lambda/2, \theta = \pi/2$)

Scilab code Solution 1.01 patternmult

```
1 //OS version = ubuntu 16.04 LTS
2 //Scilab version 5.5.2
3
4 clear;
5 clc;
6
7 lambda=1;                                // defining
8
9 d=lambda/4;                                // distance
   between the dipoles=    /4
10
```

```

11 k=(2*pi)/lambda; // defining constant
12 k=2 /
13 beta= - (%pi/2); // defining beta as phase difference between the
14 dipoles
15 theta=0:0.01:2*pi; // theta varies from 0 to 360
16
17 subplot(2,2,1); // to plot single element pattern
18
19 polarplot(theta,abs(cos(theta))); // to plot array factor
20
21 title('ELEMENT PATTERN');
22
23 AF=cos(0.5*(d*k*cos(theta)+beta)); // Expression for Array factor
24
25 subplot(2,2,2); // to plot total field of the array
26
27 polarplot(theta,abs(AF)); // to plot array factor pattern
28
29 title('ARRAY FACTOR PATTERN');
30
31 subplot(2,2,3.5); // to plot total field of the array
32
33 polarplot(theta,abs(cos(theta)).*abs(AF)); // to
34 plot total field of the array
35 title('TOTAL ARRAY PATTERN');

```

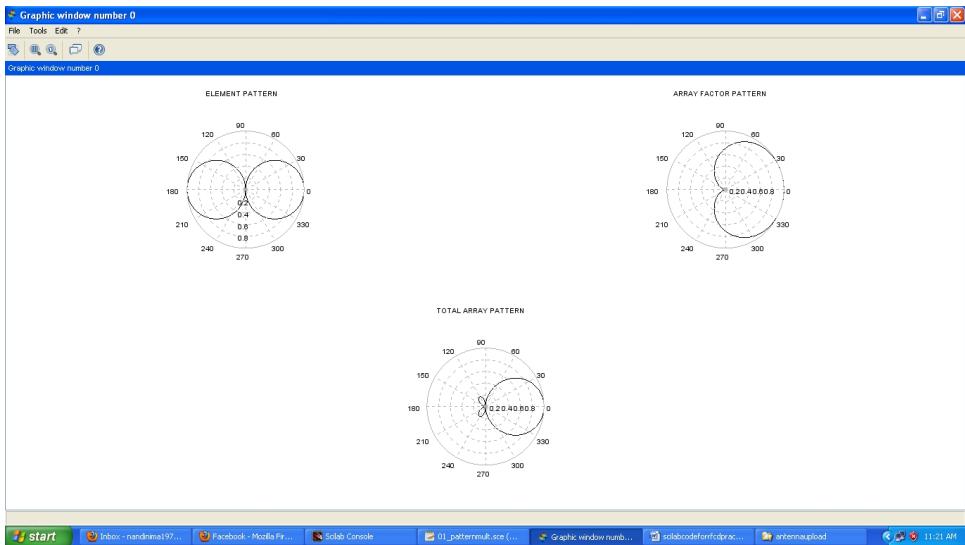


Figure 1.1: patternmult

Scilab code Solution 1.02 patternmult

```

1 //OS version = ubuntu 16.04 LTS
2 //Scilab version 5.5.2
3
4 clear;
5 clc;
6
7 lambda=1;                                // defining
8
9 d=lambda/4;                               // distance
   between the dipoles=    /4
10
11 k=(2*pi)/lambda;                         // defining constant
   k=2    /
12
13 beta= 0;                                 // defining beta
   as phase difference between the dipoles
14

```

```

15 theta=0:0.01:2*pi; //theta
    varies from 0      to 360
16
17 subplot(2,2,1);
18
19 polarplot(theta,abs(cos(theta))); ////
    to plot single element pattern
20
21 title('ELEMENT PATTERN');
22
23 AF=cos(0.5*(d*k*cos(theta)+beta)); ////
    Expression for Array factor
24
25 subplot(2,2,2);
26
27 polarplot(theta,abs(AF));
    //to plot array factor pattern
28
29 title('ARRAY FACTOR PATTERN');
30
31 subplot(2,2,3.5);
32
33 polarplot(theta,abs(cos(theta)).*abs(AF)); //to
    plot total field of the array
34
35 title('TOTAL ARRAY PATTERN');

```

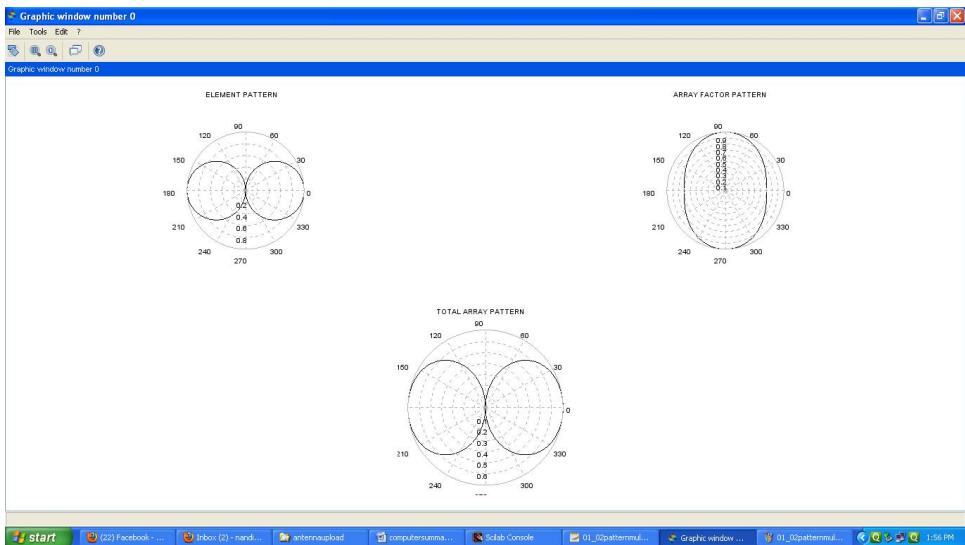


Figure 1.2: patternmult

Experiment: 2

SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT UNIFORM AMPLITUD EENDFIRE ARRAY

Scilab code Solution 2.01 endfirearray

```
1 //OS version = ubuntu 16.04 LTS
2 //Scilab version 5.5.2
3
4 clear;
5 clc;
6
7 n=10;                                //Number of
     Elements
8
9 lambda=1;                             // defining
10
11 d=lambda/4;                          // distance
```

```

        between the dipoles= /4
12
13 k=(2*pi)/lambda; // defining constant
    k=2 /
14
15 theta=0.0001:0.01:2*pi; // theta varies from 0 to 360
16
17 beta1=-(k*d); // 1 =
    kd
18
19 psi=k*d.*cos(theta)+beta1; // Progressive Phase
20
21 AF=sin(n.*psi/2)./(n*sin(psi/2)); // Expression for Array Factor
22
23 polarplot(theta,AF); // plot for
    =kd
24
25 beta2=k*d; // 2 =
    kd
26
27 psi=k*d.*cos(theta)+beta2; // Progressive Phase
28
29 AF=sin(n.*psi/2)./(n*sin(psi/2)); // Expression for Array Factor
30
31 xset('line style',3)
32
33 polarplot(theta,AF); // plot
    for =kd
34
35 title("POLAR PLOT FOR ARRAY FACTOR PATTERN FOR N
ELEMENT UNIFORM AMPLITUDE END FIRE ARRAY CASE: N
=10, d= /4, =+- (Kd)")
```

36

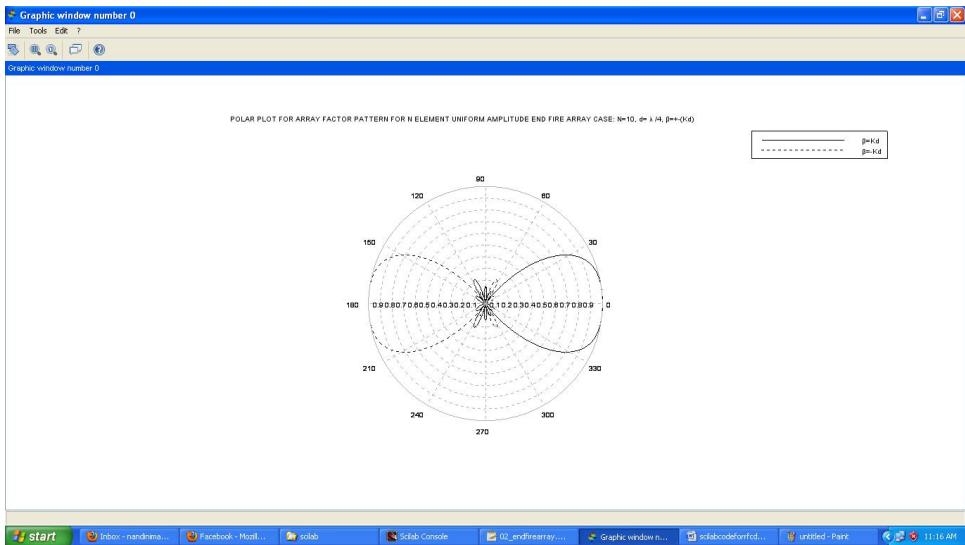


Figure 2.1: endfirearray

```
37 h1=legend(' =Kd ',' =-Kd ')
```

Experiment: 3

SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT UNIFORM AMPLITUDE BROADSIDE ARRAY

Scilab code Solution 3.01 broadsidearray

```
1 //OS version = ubuntu 16.04 LTS
2 //Scilab version 5.5.2
3
4 clear;
5 clc;
6
7 n=10;                                //Number of
     Elements
8
9 lambda=1;                             // defining
10
11 d1=lambda/4;                         // distance
```

```

        between the dipoles d1=    /4
12
13 k=(2*pi)/lambda;                      // defining constant
    k=2    /
14
15 theta=0.0001:0.01:2*pi;                //
    theta varies from 0    to 360
16
17 beta=0;                                // =0
18
19 psi=k*d1*cos(theta)+beta;              //
    Progressive Phase
20
21 AF=sin(n.*psi/2)./(n*sin(psi/2));    //
    Expression for Array Factor
22
23 polarplot(theta,AF);                  // plot for
    d1=    /4
24
25 d2=lambda;                            // distance
    between the dipoles d2=
26
27 psi=k*d2*cos(theta)+beta;              //
    Progressive Phase
28
29 AF=sin(n.*psi/2)./(n*sin(psi/2));    //
    Expression for Array Factor
30
31 xset('line style',3)
32
33 polarplot(theta,AF);                  // plot
    for d2=
34
35 title("POLAR PLOT FOR ARRAY FACTOR PATTERN FOR N
    ELEMENT UNIFORM AMPLITUDE BROADSIDE ARRAY CASE: N
    =10, d=    /4 and d=    ,    =0")
36
37 h1=legend(' d=    /4 ', ' d=    ')

```

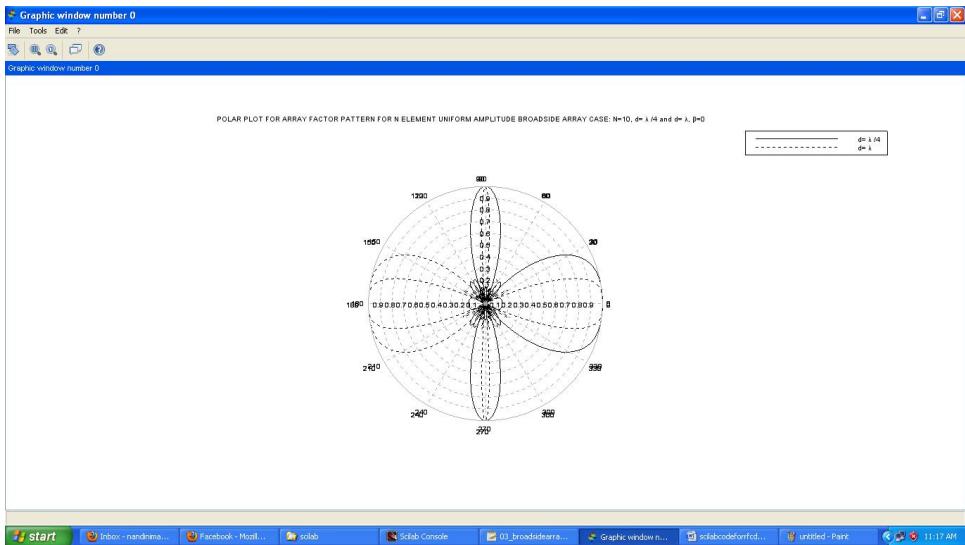


Figure 3.1: broadsidearray

Experiment: 4

SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT DOLPH TSCHEBYSCHEFF ARRAY

Scilab code Solution 4.01 dolpharray

```
1 //OS version = ubuntu 16.04 LTS
2 //Scilab version 5.5.2
3
4 clear;
5 clc;
6
7 lambda=1;                                // defining
8
9 d1=lambda/4;                               // distance
   between the dipoles d1=    /4
10
11 theta=0:0.01:2*pi;                      // Theta varies from 0
   to 360
12
```

```

13 u1=(%pi*d1/lambda).*cos(theta); //u1 =
    d1 / * cos
14
15 AF1=2.798.*cos(u1)+2.496.*cos(3.*u1)+1.974.*cos(5.*u1)+1.357.*cos(7.*u1)+cos(9.*u1);
16 //expression for array factor
    pattern for N=10, 2M=10
17
18 p=get("hdl"); //get handle
    on current entity (here the polyline entity)
19
20 p.line_style=1;
21
22 polarplot(theta,AF1) //plot polar plot
23
24 d2=lambda/2; //distance
    between the dipoles d2= /2
25
26 u2=(%pi*d2/lambda).*cos(theta); //u2 =
    d2 / * cos
27
28 AF2=2.798.*cos(u2)+2.496.*cos(3.*u2)+1.974.*cos(5.*u2)+1.357.*cos(7.*u2)+cos(9.*u2);
29 //expression for array factor
    pattern for N=10, 2M=10
30
31 p.line_style=8;
32
33 title('POLAR PLOT OF ARRAY FACTOR PATTERN OF N
    ELEMENT DOLPH TSCHEBYSCHEFF ARRAY CASE: N=10 and
    d = /4 , /2 ');
34
35
36 polarplot(theta,AF2) //plot polar plot
37
38 hl=legend('d = /4 ', 'd = /2 ');

```

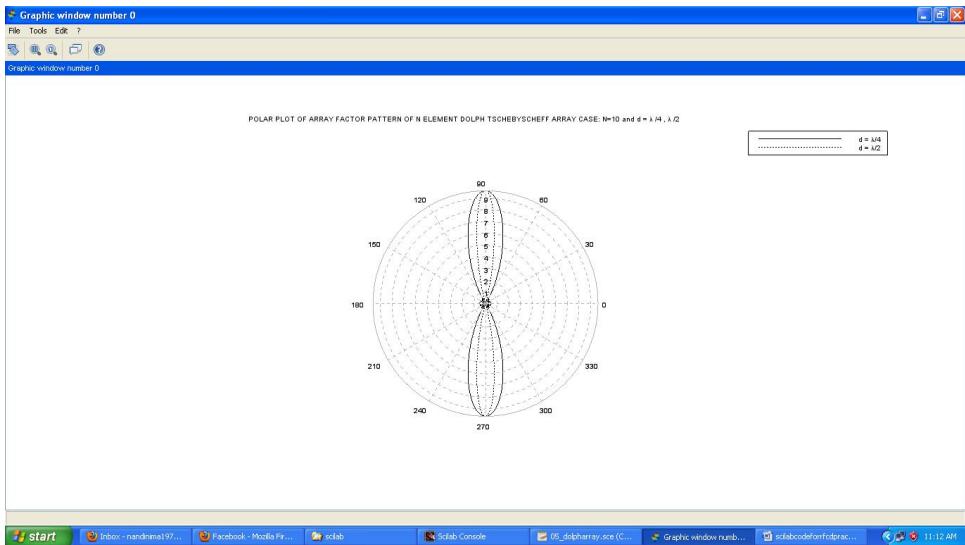


Figure 4.1: dolpharray

Experiment: 5

SCILAB CODE FOR ARRAY FACTOR PATTERN OF N ELEMENT BINOMIAL ARRAY

Scilab code Solution 5.01 binomialarray

```
1 //OS version = ubuntu 16.04 LTS
2 //Scilab version 5.5.2
3
4 clear;
5 clc;
6
7 theta=0:0.001:2*pi;                                //theta
    varies from 0      to 360
8
9 lambda=1;                                         // defining
10
11 d1=lambda/4;                                     // distance
```

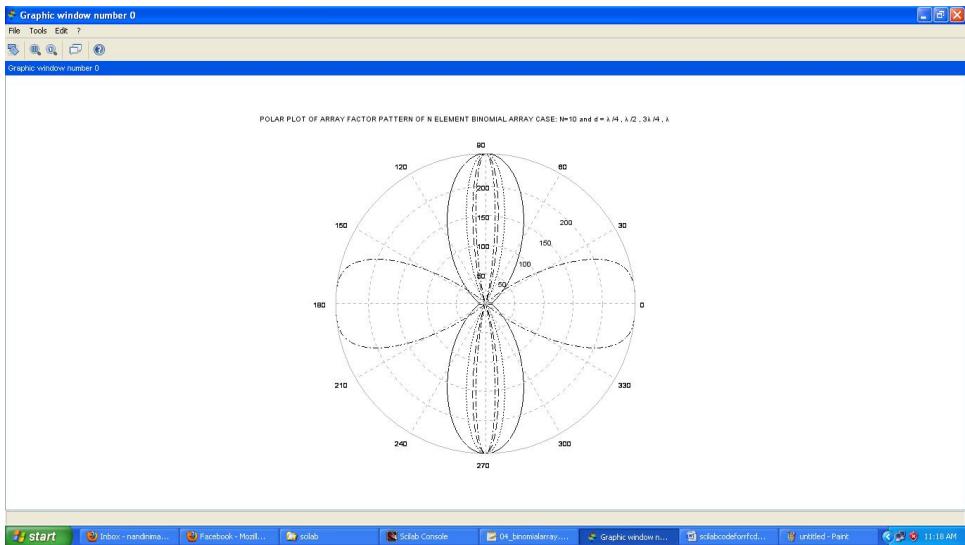


Figure 5.1: binomialarray

between the dipoles $d_1 = \lambda/4$

```

12
13 u1=(%pi*d1/lambda).*cos(theta); //u1 =
    d1 / * cos
14
15 AF1=126.*cos(u1)+84.*cos(3*u1)+36.*cos(5*u1)+9.*cos
    (7*u1)+cos(9*u1); //expression for

    //array factor N=10, N=2M, AF= an cos(2n-1)u
    for n=1 to M
16 p=get("hdl"); //get handle on
    current entity (here the polyline entity)
17
18 p.line_style=1;
19
20 polarplot(theta,AF1) //polar plot of AF
21
22 d2=lambda/2 //distance between the
    dipoles d2= /2
23

```

```

24 u2=(%pi*d2/lambda).*cos(theta); //u2 =
    d2 / * cos
25
26 AF2=126.*cos(u2)+84.*cos(3*u2)+36.*cos(5*u2)+9.*cos
    (7*u2)+cos(9*u2); //expression for
27 //array
    factor

28
29 p.line_style=8;
30
31 polarplot(theta,AF2) //polar plot of AF
32
33
34 d3=3*lambda/4 //distance between the
    dipoles d3= 3 /4
35
36 u3=(%pi*d3/lambda).*cos(theta); //
    u3 = d3 / * cos
37
38 AF3=126.*cos(u3)+84.*cos(3*u3)+36.*cos(5*u3)+9.*cos
    (7*u3)+cos(9*u3); //expression for
39 //array
    factor

40
41 p.line_style=2;
42
43 polarplot(theta,AF3)

    //polar plot of AF
44

```

```

45 d4=lambda // distance
        between the dipoles d4=
46
47 u4=(%pi*d4/lambda).*cos(theta); // u4
        = d4 / * cos
48
49 AF4=126.*cos(u4)+84.*cos(3*u4)+36.*cos(5*u4)+9.*cos
        (7*u4)+cos(9*u4); // expression for
50                                         // array
                                         factor
51
52 p.line_style=6;
53
54 polarplot(theta,AF4) // polar plot of
        AF
55
56 title('POLAR PLOT OF ARRAY FACTOR PATTERN OF N
        ELEMENT BINOMIAL ARRAY CASE: N=10 and d =      /4 ,
        /2 , 3      /4 ,      ');
57
58 h1=legend('d =      /4'; 'd =      /2'; 'd = 3      /4'; 'd =
        ');

```
